


# TOPSY 2000™

## With Keyed Lock System

### Operating Instructions


1

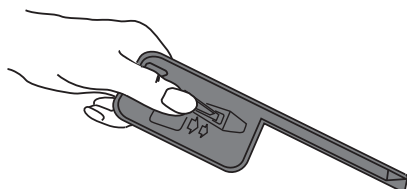

Ensure illustration is uppermost.

2


Insert the key **all the way** into the lock. (Do not turn the key.) This will automatically release the locking mechanism.

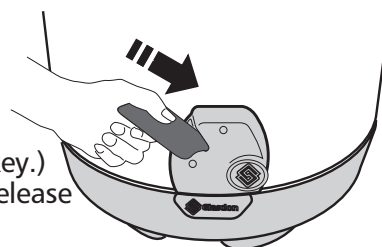

**Important:** Prior to installation or ballasting, it may be necessary to restrain the Plinth from spinning when removing the Hood. See note A.


3

With the key still in position, turn bin body anti-clockwise, and lift bin body over liner.

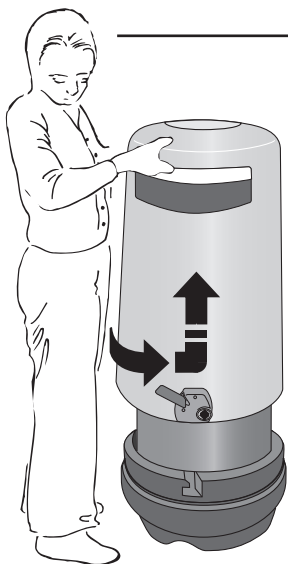


4

Remove the key at this stage.



5

Lift liner out of plinth, empty and place back into plinth. Ensure handles drop outside the liner.

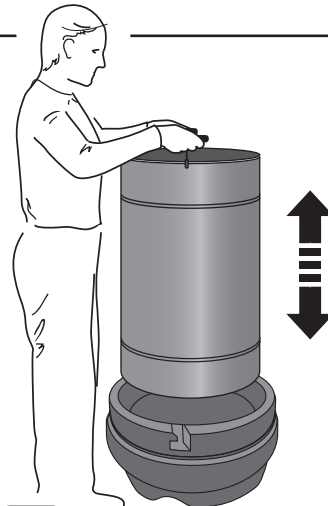

6

Lift bin body over liner and lower to rest on plinth, turn bin body clockwise to lock.



- PLEASE NOTE**
- A** Glasdon recommends ALL TOPSY 2000 Litter Bins be ground fixed or ballasted to maximise the performance of the unique locking System.
  - B** Prior to bolting the Plinth to the ground, rotate the complete unit until the litter apertures are in the preferred alignment.
  - C** Regular cleaning is essential to maintain the pristine appearance of this quality product. All surfaces of the unit should be regularly cleaned with warm, soapy water and thoroughly rinsed. *This is important in maintaining both the outward appearance of the product and ensuring ease of operation.* Any damaged components should be replaced. Spares are available direct from Glasdon U.K. Ltd.

*Glasdon U.K. Ltd. cannot be held responsible for claims arising from incorrect installation, unauthorised modification or misuse of the product.*