

Glasdon **OPERATIONAL INSTRUCTIONS** Ensure that all personnel read the points listed within this leaflet and that a copy is given to staff involved with the installation and maintenance of this product. Glasdon recommends that a full Health and Safety analysis is carried out prior to installation. **CENTRUM CUP STACKER COMPONENTS:** 1 ITEM 1 - Cup Stacker Bracket ITEM 2 - Cup Tube ITEM 3 - Quick Release Mechanism ITEM 4 - Drip Tray 2 ITEM 5 - Drip Tray Bracket 5 3


EMPTYING THE CUP TUBE / DRIP TRAY



To transport the Cup Tube, lift the tube off the Cup Stacker Bracket.



Using the Stainless Steel ring, open the Quick Release Mechanism to remove cups.



Δ

To empty or clean the Drip Tray, remove the Drip Tray from the Drip Tray Bracket.

NEXUS 100


INSTALLATION INSTRUCTION MANUAL







Ensure that all relevant personnel read the points listed within this leaflet and that a copy is given to staff involved with the installation and maintenance of this product. Glasdon recommends that a full Health and Safety analysis is carried out prior to installation.

PLEASE REFER TO 'THE MANUAL HANDLING OPERATIONS REGULATIONS 1992' DURING HANDLING. PLEASE REFER TO THE NEXUS 100 INSTRUCTION MANUAL(S) FOR FURTHER GUIDANCE WITH THIS PRODUCT (S).

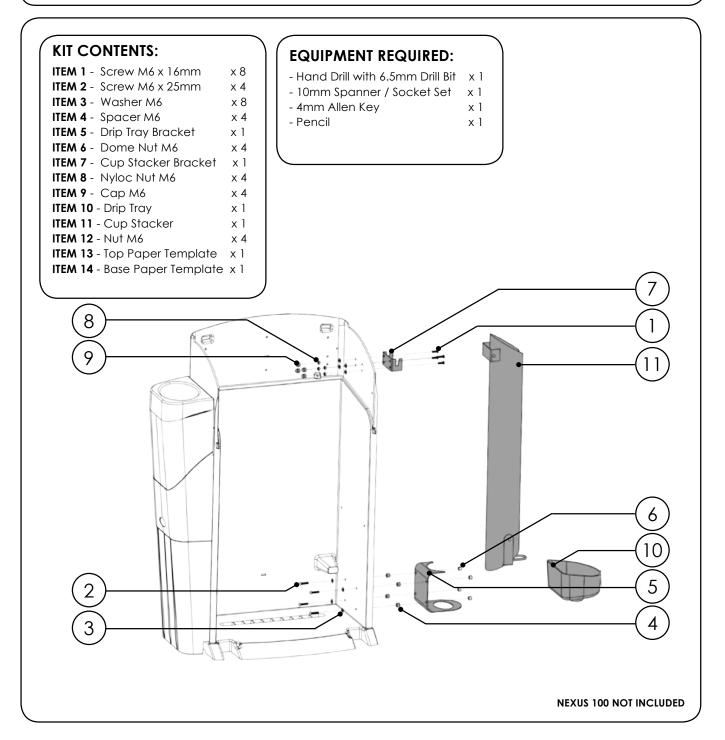


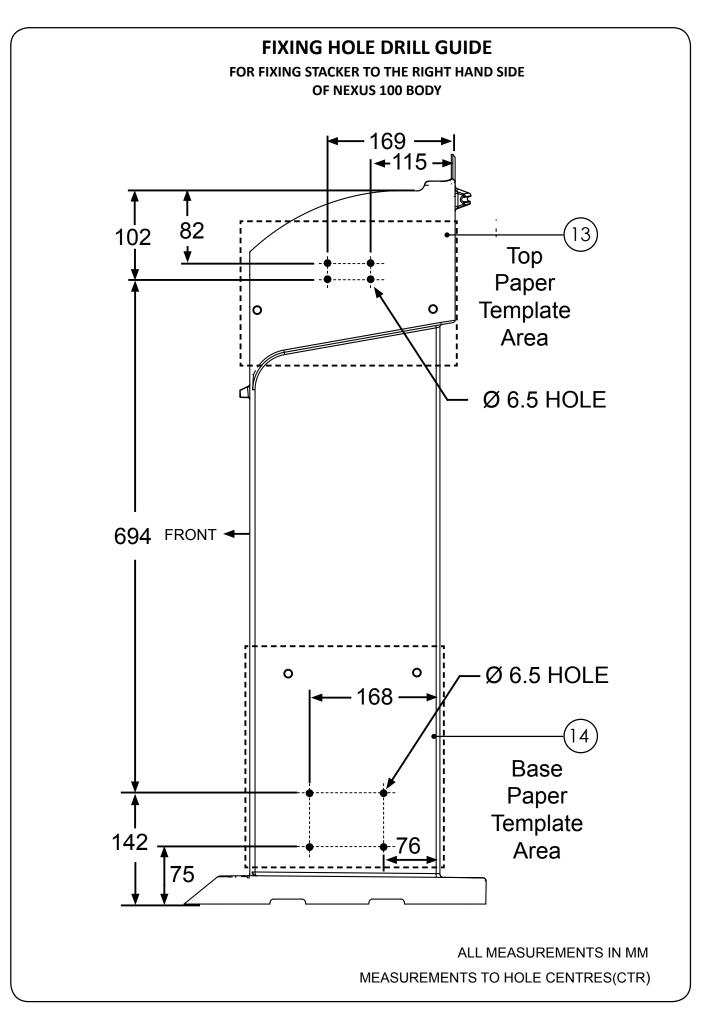


INSTALLATION MANUAL FOR FOR FIXING STACKER TO THE RIGHT HAND SIDE OF NEXUS 100 BODY




Place ITEM 14 in place on the right hand side of the bin body. Align the template with the holes as instructed on the template in the body and poke through with a pencil. Use 2 x ITEM 1 & ITEM 12 to temporarily fix the template to the bin.




Lay the bin body on its side, drill the 4 new holes in the bin body using the hand drill. Once complete, remove the fixings and the paper template from the bin body.




Open the lid and remove the door of the bin. Align ITEM 13 with the existing holes at the top of the Nexus 100 Body. Repeat step 1 & 2 to drill the 4 new holes at the top of the bin body.




Place ITEM 3 onto ITEM 2. From the inside of the bin, push the Screw with Washer through one of the four fixing holes at the base of the bin body.




Place ITEM 4 onto the Screw. from the outside of the body.




Place ITEM 5 over the Screw.




Place ITEM 6 onto the Screw and tighten by hand.



Tighten ITEM 6 securing ITEM 5 to the Nexus 100 body with the Spanner and Allen Key.




Repeat steps 4 - 8 for all 4 fixings holes, to secure the Drip Tray bracket to the Nexus 100 body.







At the top of the bin body, align ITEM 7 over the fixing holes on the outside of the Nexus 100. Place ITEM 1 through one of the 4 fixing holes. On the inside of the Nexus 100 Body place ITEM 3 onto ITEM 1 and fit ITEM 8 onto ITEM 1. Tighten the nut with the Spanner and Allen Key.



On the inside of the bin body, Place ITEM 9 over ITEM 8.



Repeat steps 10 - 12 for all 4 fixing holes, securing the Cup Stacker Bracket to the body of the Nexus 100.



Place ITEM 10 onto ITEM 5 and mount ITEM 11 onto the ITEM 7.



Glasdon , Centrum and Nexus are trademarks or registered trademarks of glasdon group OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES

> A planned maintenance schedule or regular inspection is recommended, replacing components as necessary.

Replacement components are available direct from GLASDON. GLASDON cannot be held responsible for claims arising from incorrect installation, unauthorised modifications or misuse of the product.

Issue 3 - October 2017 - Stock No. C000/0504 - DWG Nc07B-368-06

© Copyright OCTOBER 2017

Glasdon UK Ltd reserve the right to alter specifications without prior notice.



Tel: (01253) 600410 Fax: (01253) 792558 e-mail: Ig@glasdon-uk.co.uk web: www.glasdon.com