

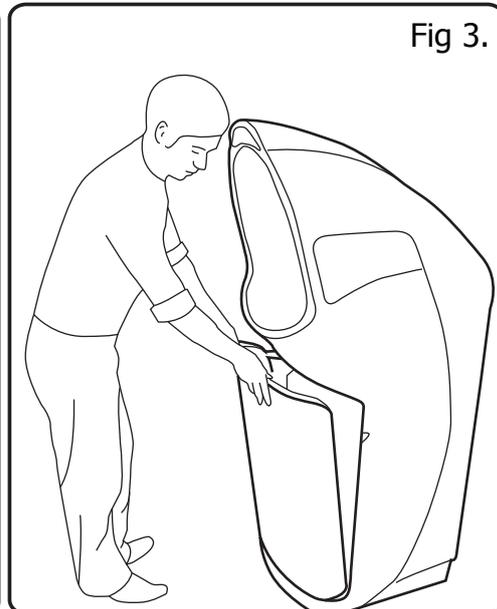
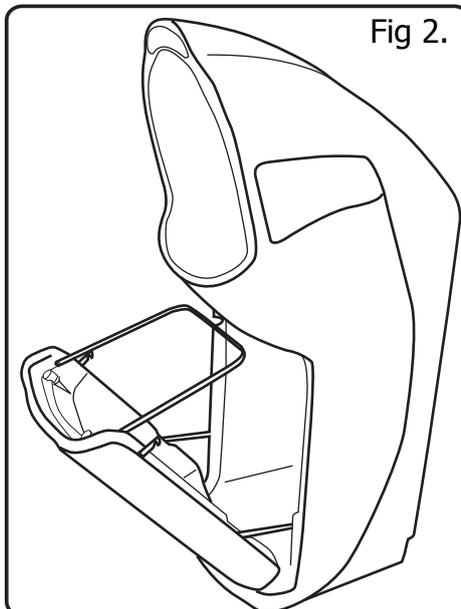


## COMBO DELTA™ INSTRUCTION LEAFLET

**NOTE:** Ensure that all relevant personnel read the points listed below and that a copy is passed on to staff involved with the installation. Please also refer to the 'Manual Handling Operations Regulations 1992' during the handling of the product and materials used for installation.



### OPENING AND CLOSING THE UNIT:

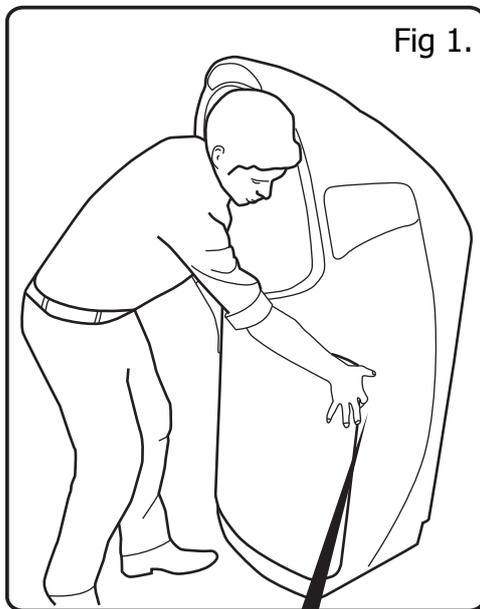

1. Lift both catches on either side of the door at the same time. Fig 1.
2. Lower the door out until it is resting on the retention straps. Fig 2.
3. To close push the door to until the catches click into place. Fig 3.

### INSERTING A SACK:

1. Hook the open sack over the steel sack band. Fig 4.
2. Lifting the sack band slightly, hook the remaining sack over the two rubber grips located on both corners of the bin and replace the sack band to ensure a tight fit. Fig 5.

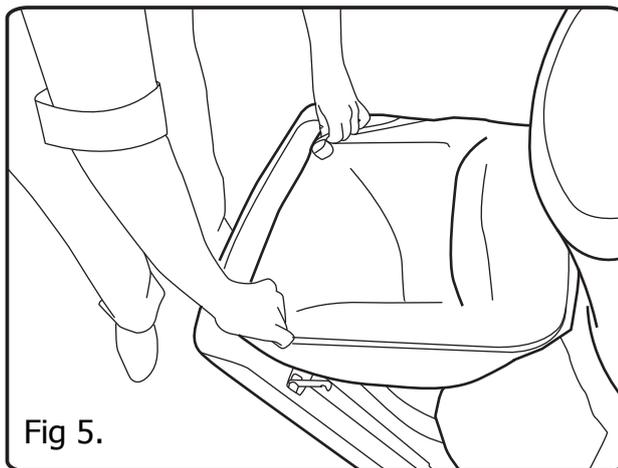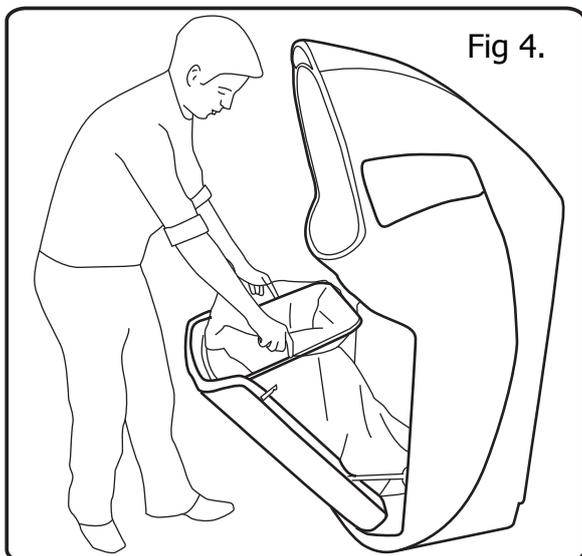

## GROUND FIXING:

### KIT CONTENTS:

ITEM 1	TLM Fixing Bolts	x4
ITEM 2	37mm Plastic Spacers	x2
ITEM 3	M10 x 50mm Washers	x2

### TOOLS REQUIRED:

Hammer  
17mm Spanner and Socket Head  
Electric Drill  
10mm Masonry Drill Bit  
Marker Pen

1. Remove the two black hole plugs at the front inside base of the unit.
2. Using the fixing holes as a guide, mark on the ground where the ground fixing bolts will go.
3. Drill the four holes marked to a depth of 55mm using a 10mm masonry drill.
4. Remove the nut from the fixing bolts (Item 1) and slide on the plastic spacers (Item 2) followed by an M10 washer (Item 3).
5. Using the hammer insert the two rear fixing bolts into the ground leaving 65mm protruding above ground. Fig 6.
6. Slide the bin backwards onto the fixing bolts ensuring the bolts are located within the fixing recesses. Fig 7.
7. Insert the remaining fixing bolts through the front of the unit.
8. Fully tighten all bolts using the supplied nuts until the bin is securely fixed. Fig 8 and 9.

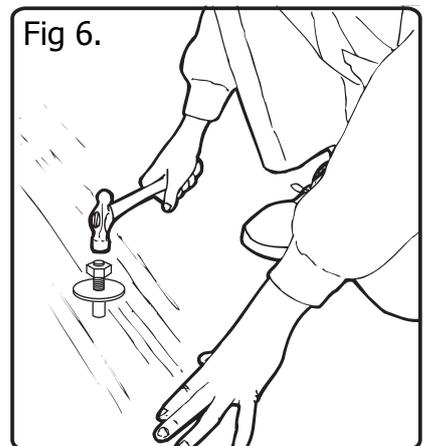


Fig 6.

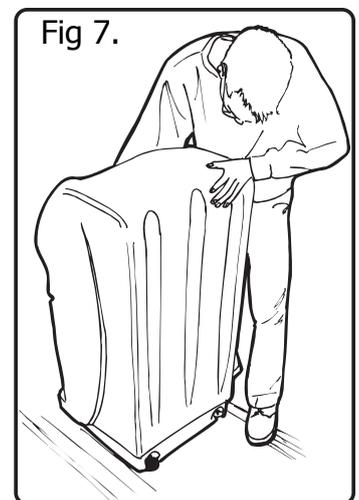


Fig 7.

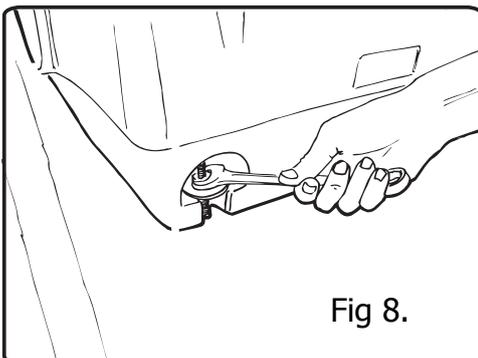


Fig 8.

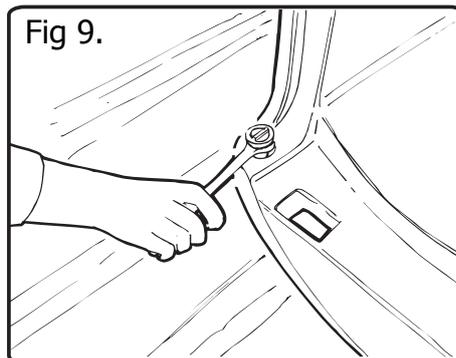


Fig 9.

## CLEANING AND MAINTENANCE:

### Cleaning

We would recommend a warm pressure wash with soap or alternatively hand wash with 10% solution of mild detergent in warm water using a soft bristle brush followed by a rinse with clean water.

### Graffiti

Felt tip pen or paint may be removed from Durapol™ using Glasdon Graftix™ Graffiti wipes or other proprietary graffiti remover. Carefully follow the instructions, particularly the guidelines covering safety. Ensure that all traces of chemicals are removed then clean as detailed above. Please be aware that graffiti removers can damage signs and personalisation stickers etc. Protect these areas when using graffiti removers.

### Maintenance

A planned maintenance schedule of regular inspection is recommended and components replaced when necessary.



**Glasdon** COMBO IS A TRADEMARK OF GLASDON GROUP AND ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES.

Replacement components are available direct from GLASDON.  
Glasdon U.K. Ltd reserves the right to alter specifications without prior notice.  
GLASDON cannot be held responsible for claims arising from incorrect installation, unauthorised modifications or misuse of the product.

Issue 1 February 2012 C000 /0420  
© Copyright 2011



**Glasdon**

Preston New Road  
BLACKPOOL  
Lancashire FY4 4UL  
Tel: 01253 600410  
Fax: 01253 792558  
E-mail: sales@glasdon-uk.co.uk  
Web: www.glasdon.com