





Dog Waste Bin Installation Instructions


There are two options available for fixing the FIDO BIN-

- Ground Lock and Post Fixing System
- The Extended Base Post

Important: When selecting a site for the FIDO BIN ensure there are no buried services.

THE 'GROUND LOCK™' AND POST FIXING SYSTEM

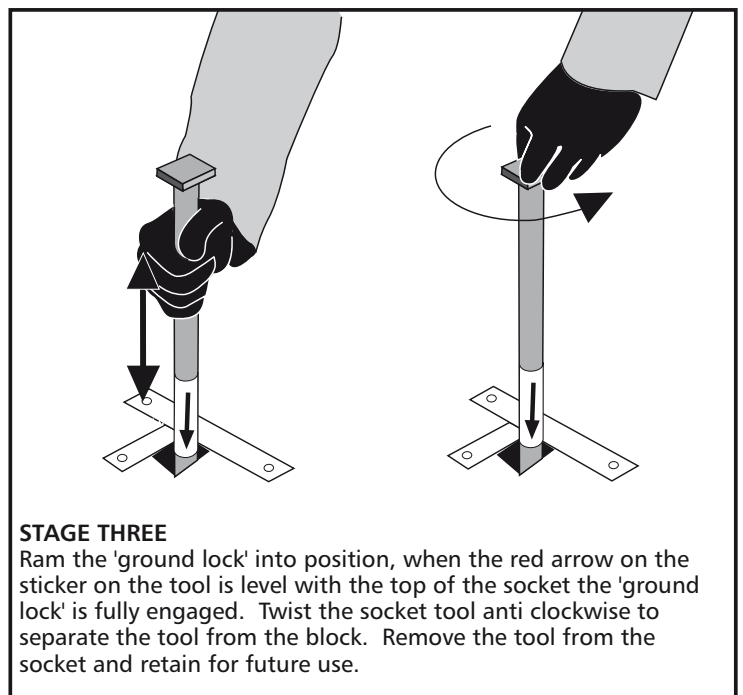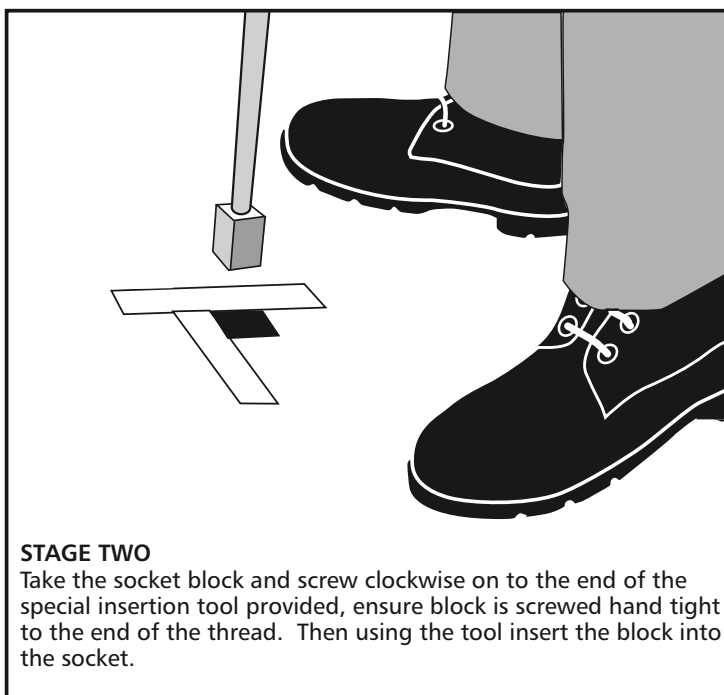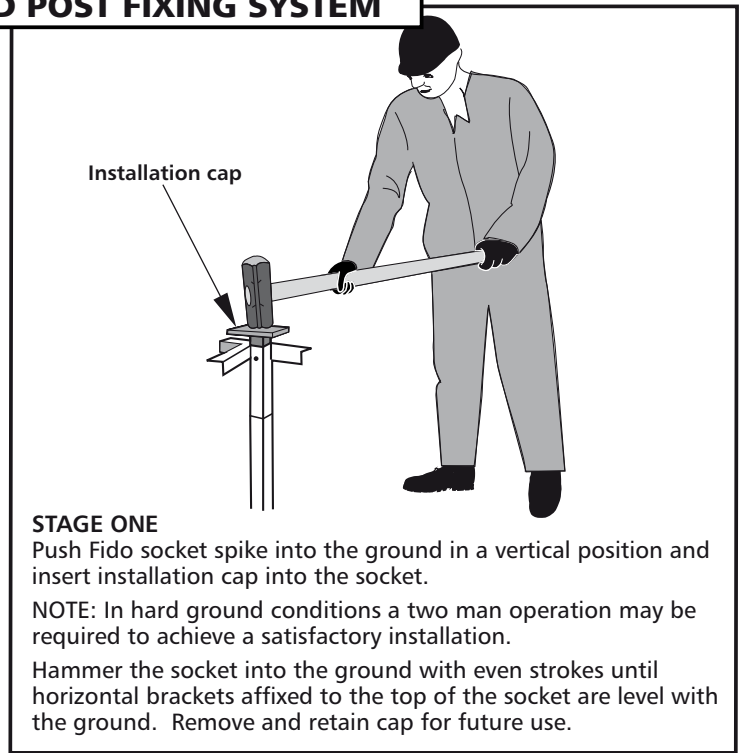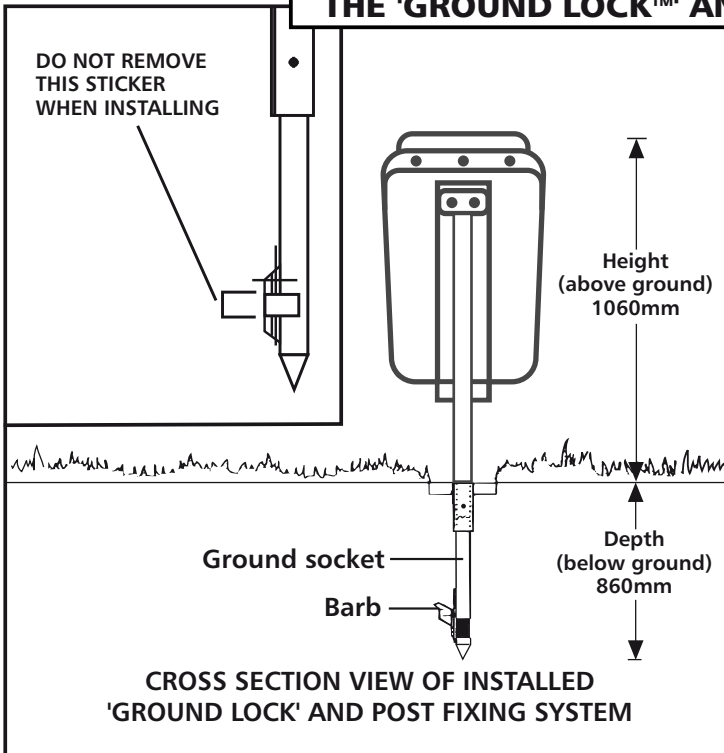

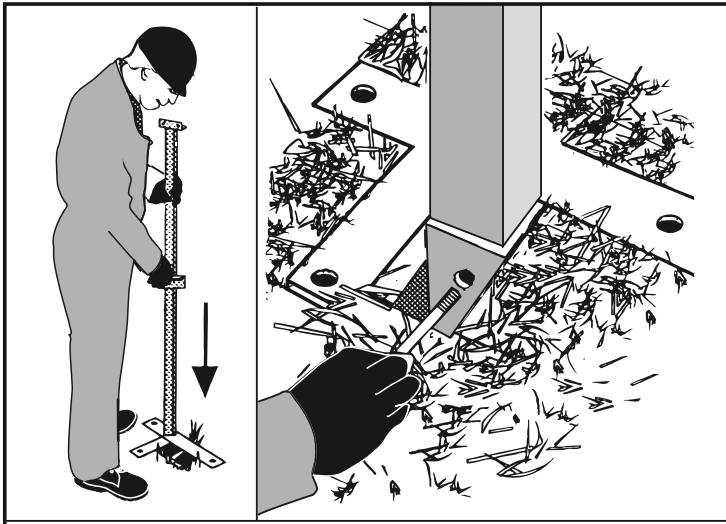


STAGE FOUR

Compact or remove earth locally around the post to expose fixing bolt holes.

Line the fixing holes up on the post and socket, and then insert the post, onto which the Fido bin is to be attached, into the socket to achieve the preferred bin orientation.


Insert the bolt provided and hand tighten the bolt into a captivated nut. Tighten the bolt with a ratchet spanner until the post is firmly in the socket.

Replace earth around the socket base to cover over the ground socket.

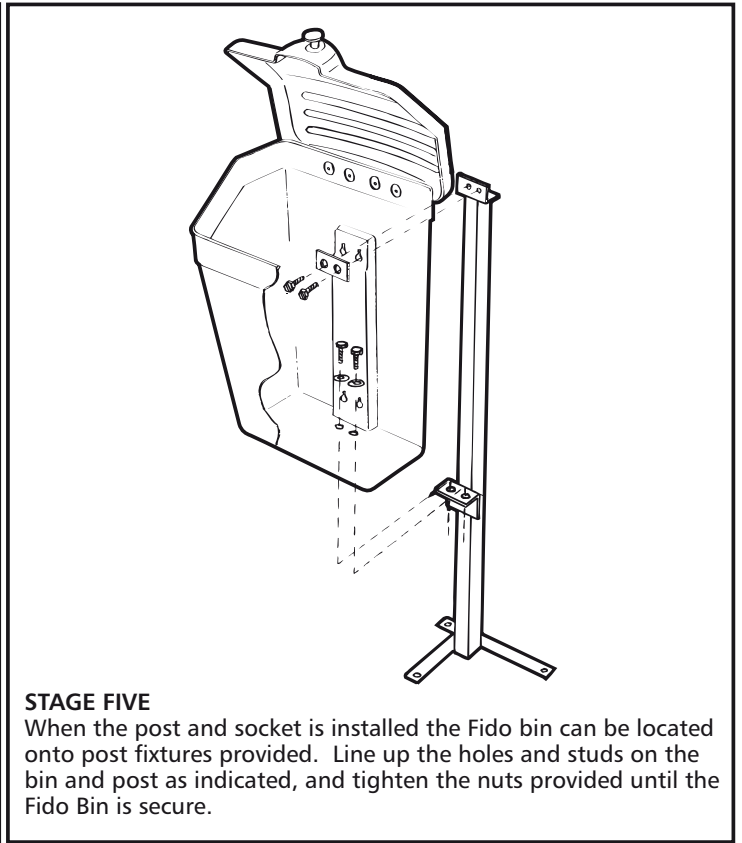

STAGE FIVE

When the post and socket is installed the Fido bin can be located onto post fixtures provided. Line up the holes and studs on the bin and post as indicated, and tighten the nuts provided until the Fido Bin is secure.

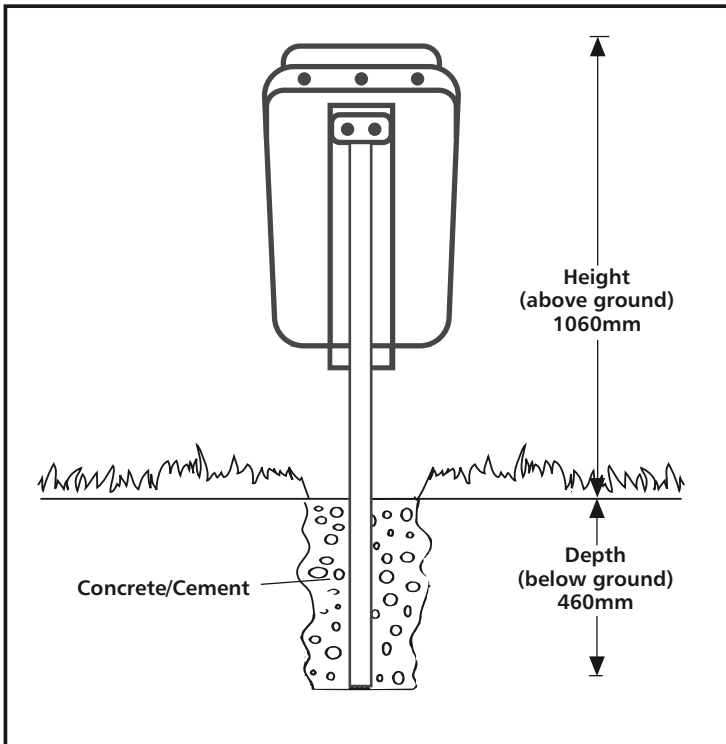

EXTENDED BASE POST

The installation of the Fido Bin onto an extended base post requires the following basic steps.

STAGE ONE


Excavate the site in order to provide a post depth below ground of 460mm (approx 18").

STAGE TWO

Place post into the dug hole and fill to ground level with the appropriate well compacted concrete mix, allow the concrete to set and harden.

STAGE THREE

Line up the holes and studs on the bin and post as indicated previously in stage five and secure the Fido Bin in place.

 **Glasdon**® AND FIDO™ ARE TRADEMARKS OR REGISTERED TRADEMARKS OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES

- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON.
- GLASDON cannot be held responsible for claims arising from incorrect installation, unauthorised modifications or misuse of the product.



Glasdon®

Glasdon U.K. Limited

Preston New Road
BLACKPOOL
Lancashire
FY4 4UL

Tel: (01253) 600410

Fax: (01253) 792558

e-mail: sales@glasdon-uk.co.uk

web: www.glasdon.com