


NEXUS[™]100

METAL LINER OPERATOR INSTRUCTION LEAFLET

IMPORTANT NOTE: ENSURE THAT ALL RELEVANT PERSONNEL READ THESE INSTRUCTIONS PRIOR TO USE

Securing Liner To Door

- 1) Remove door and sit metal liner on the door base so that the liner handle is closest to the door.
- 2) Place metal liner handle over the buffer located on the back of the door to secure in position.

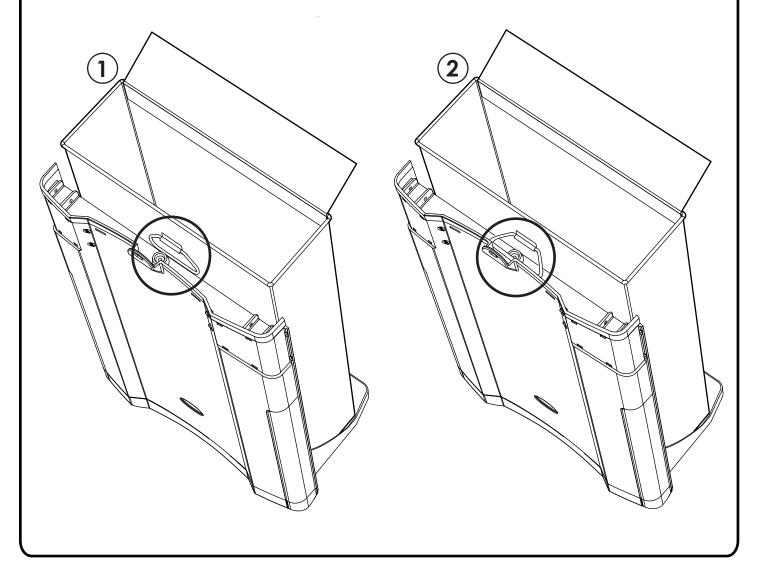



Glasdon AND NEXUS™ 100 ARE TRADEMARKS OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES

- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON UK LIMITED.
- GLASDON UK LIMITED cannot be held responsible for claims arising from incorrect installation, unauthorised modifications or misuse of the product.

Issue 1 January 2011 C000/0380

© Copyright 2011

Glasdon UK Ltd reserve the right to alter specifications without prior notice.



Preston New Road BLACKPOOL Lancashire FY4 4UL Tel: 01253 600410

Fax: 01253 792558

email: sales@glasdon-uk.co.uk

web: www.glasdon.com