



TOPSY ROYALE™

With Keyed Lock System

Operating Instructions

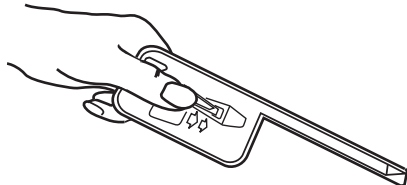


1 Ensure illustration is uppermost.

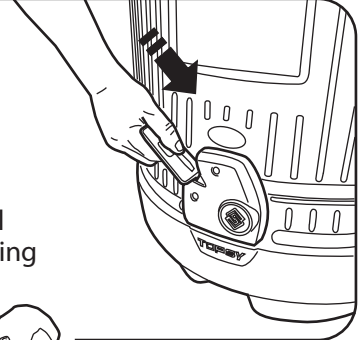


2 Insert the key all the way into the lock. (Do not turn the key.) This will automatically release the locking mechanism.




3 With the key still in position, turn bin body anti-clockwise, and lift bin body over liner. (See note A)

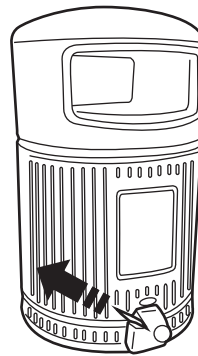

4 Remove the key at this stage.

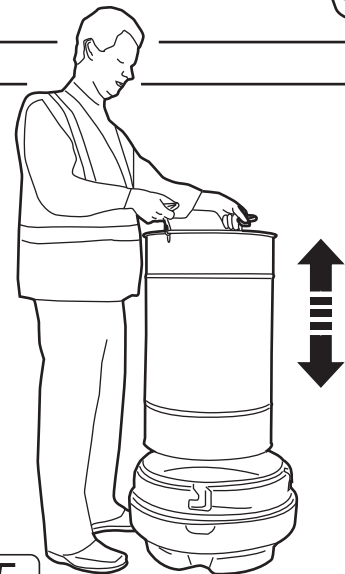

5 Lift liner out of plinth, empty and place back into plinth. Ensure handles drop outside the liner.

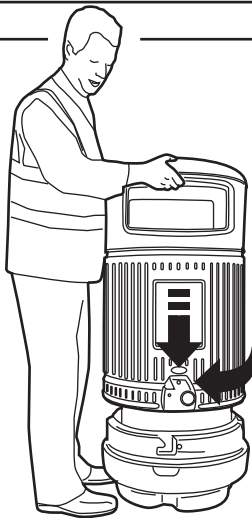

6 Lift bin body over liner and lower to rest on plinth, turn bin body clockwise to lock.

PLEASE NOTE

- A** Prior to installation and removal of the bin body it may be necessary for an assistant to firmly hold plinth while the operator manoeuvres the bin body in accordance with the attached operating instructions.
- B** The Topsy Royale must be ground fixed or ballasted to maximise the performance of Glasdon's unique Locking System.
- C** Regular cleaning is essential to maintain the pristine appearance of this quality product. All surfaces of the unit should be regularly cleaned with warm, soapy water and thoroughly rinsed. This is important in maintaining both the outward appearance of the product and ensuring ease of operation. Any damaged components should be replaced. Spares are available direct from Glasdon U.K. Ltd.
Glasdon U.K. Ltd. cannot be held responsible for claims arising from incorrect installation, unauthorised modification or misuse of the product.