



TOPSY ROYALE™

Keyless Lock System Operating Instructions

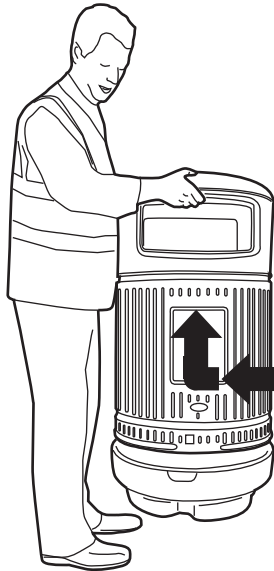


1 Lifting the bin body, turn clockwise until it moves up to a stop and hold.
(See note A)


2 Lower a fraction, continue to turn bin body clockwise, and lift until it is released from the plinth.

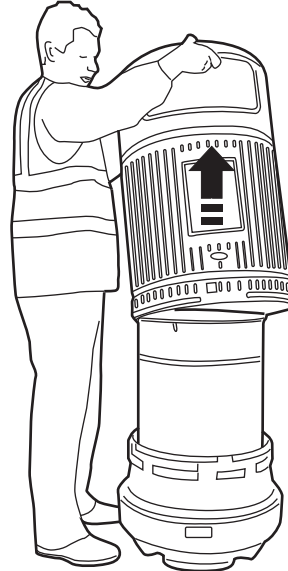

3 Lift bin body over liner

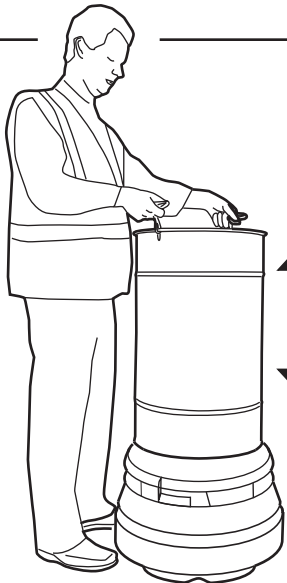

4 Lift liner out of plinth, empty and place back into plinth. Ensure handles drop outside the liner.

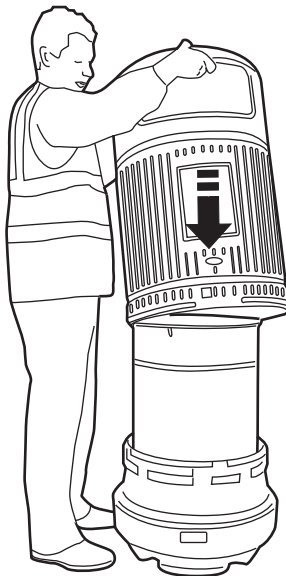

5 Lift bin body over liner and drop onto plinth to lock. Turn bin body to align apertures.

- A** PLEASE NOTE
Prior to installation and removal of the bin body it may be necessary for an assistant to firmly hold plinth while the operator manoeuvres the bin body in accordance with the attached operating instructions.
- B** All TOPSY 2000 Litter Bins require to be ground fixed or ballasted to maximise the performance of Glasdon's unique Keyless Locking System.
- C** Regular cleaning is essential to maintain the pristine appearance of this quality product. All surfaces of the unit should be regularly cleaned with warm, soapy water and thoroughly rinsed. This is important in maintaining both the outward appearance of the product and ensuring ease of operation.

Any damaged components should be replaced. Spares are available direct from Glasdon U.K. Ltd.

Glasdon U.K. Ltd. cannot be held responsible for claims arising from incorrect installation, unauthorised modification or misuse of the product.