

STORAGE BUNKERS

INSTALLATION INSTRUCTIONS


INSTRUCTIONS FOR CONCRETE FIXING KIT (INTO PREPARED CONCRETE FOUNDATION)

IMPORTANT NOTE: TO ENSURE A SECURE AND ROBUST INSTALLATION THE UNIT SHOULD BE SITED ONTO A SOUND CONCRETE FOUNDATION AND THE 50MM DIAMETER WASHER MUST BE USED. WE STRONGLY RECOMMEND THAT THE UNIT IS **NOT** INSTALLED ONTO TARMAC OR BLOCK PAVED AREAS.

DISTANCE FROM EDGE OF FOUNDATION TO CENTRE OF GROUND BOLT TO BE NO LESS THAN 110MM

Permanently sited onto a prepared concrete ground site (20-30N/mmsq) utilising 4 M10x140mm ground fixing bolts.
Note: The ground fixing kit is an optional extra.

- 1) Position unit onto siting area ensuring it is the correct distance away from the edge of the concrete (minimum 110mm) and is in the correct orientation.
- 2) From the inside of the unit mark hole positions onto the concrete through the fixing holes in the base with a 10mm diameter masonry drill. Remove the unit.
- 3) Using a 10mm diameter masonry drill bit, drill and clean out anchor holes to a minimum depth of 150mm. Position unit back over the drilled holes.
- 4) Assemble the ground bolts as shown in diagram opposite by removing the 20mm washer and replacing it with the 50mm washer. Drive the ground bolts through the holes in the base of the unit and into the holes in the concrete.
- 5) Tighten nut with correct spanner until fixings are secure. Max recommended torque setting - 20lbs/ft (27Nm). Place the 4 off bungs provided over the fixings to create a smooth surface for ease of cleaning.
- 6) In the event of the unit being removed, simply remove the bolt to leave the site hazard free. NOTE: For alternative fixing methods please contact us for details.

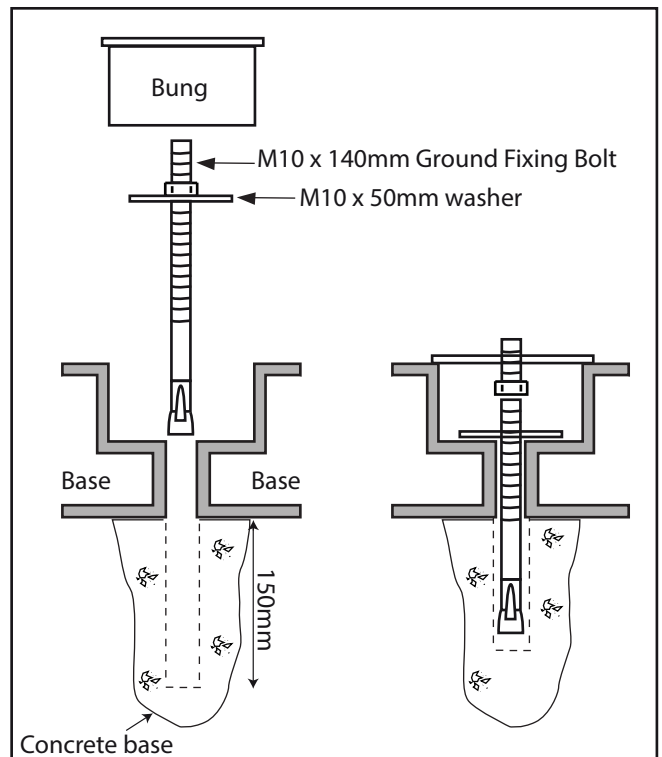

 Glasdon IS A TRADEMARK OF GLASDON GROUP OR ITS SUBSIDIARIES IN THE U.K. AND OTHER COUNTRIES

- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON UK LIMITED.
- GLASDON UK LIMITED cannot be held responsible for claims arising from incorrect installation, unauthorised modifications or misuse of the product.

16B096-31 Issue 1 February 2024 C000/1048
© Copyright February 2024
Glasdon UK Ltd reserve the right to alter specifications without prior notice.



Glasdon
Glasdon U.K. Limited

Preston New Road
BLACKPOOL
Lancashire FY4 4UL
Tel: 01253 600410
Fax: 01253 792558
email: sales@glasdon-uk.co.uk
web: www.glasdon.com